

UPHOLSTERY MATRIX BY COLLECTIONS

LEGEND
 - Not available
 ● Available
 ○ See specifications

| | AARHUS | AIR | ALTEA | ANN | ARC | ARUM | ARYN | ARYN MAX | ARYN WOOD | AVALON | BINAR 60 | BINAR EXECUTIVE | DIVIDERS / SCREENS | DUNAS LOUNGE | DUNAS XL | DUNAS XS | ENTROPY | ESCALAS | ETNIA | ITEK | ITEK 200 | LAPSE | LUND | MARCUS | MILLENIUM | NIM | PAU | PLANIA BENCH | SUN | TAIA | TAO | TEN | TETRIS | UNNIA | UNNIA TAPIZ | VARYA | VARYA TAPIZ | VARYA WOOD | |
|-----------------|--------|-----|-------|-----|-----|------|------|----------|-----------|--------|----------|-----------------|--------------------|--------------|----------|----------|---------|---------|-------|------|----------|-------|------|--------|-----------|-----|-----|--------------|-----|------|-----|-----|--------|-------|-------------|-------|-------------|------------|---|
| LEATHERS | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| G10 - Leather | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | - | ● | ● | ● | ○ | ○ | ● | ● | ● | ● | ● | ● | ● | ● | ○ | ● | ● | ● | ● | ● | ○ | ● | ● | ● | ● | ● | ● |
| G11 - Leather | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | - | ● | ● | ● | ○ | ○ | ● | ● | ● | ● | ● | ● | ● | ● | ○ | ● | ● | ● | ● | ● | ○ | ● | ● | ● | ● | ● | ● |

G10 - LEATHER

TECHNICAL DATA

Composition:

Cow leather.

Light fastness:

≥4/5, UNI EN ISO 105B02.

Fastness to rubbing:

Wet ≥4 (150 cycles).

Dry ≥4 (500 cycles).

Perspiration ≥4 (80 cycles), UNI EN ISO 11640: 1998 - 11641 (pH8).

Tear strength:

>20N, EN ISO 3377-1.

Determination of PH:

>3,5, EN ISO 4045.

Adhesion of the finish:

≥2, UNI EN ISO 11644.

Determination of dry ex resistance:

Without damage, UNI EN ISO 5402.

Flammability:

Ignition source 0 (cigarette).

Ignition source 1 (match).

BS 5852-1979.

BS EN 1021-1-2:2006.

Thickness:

0,9 - 1,1mm

Average surface:

4,8 - 5,0m²

Maintenance:


Wash with neutral soap and water or with a cleaning product for leather.

***Batch to batch variations may occur within commercial tolerances.

Note:

- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request a real leather sample before ordering.

- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.

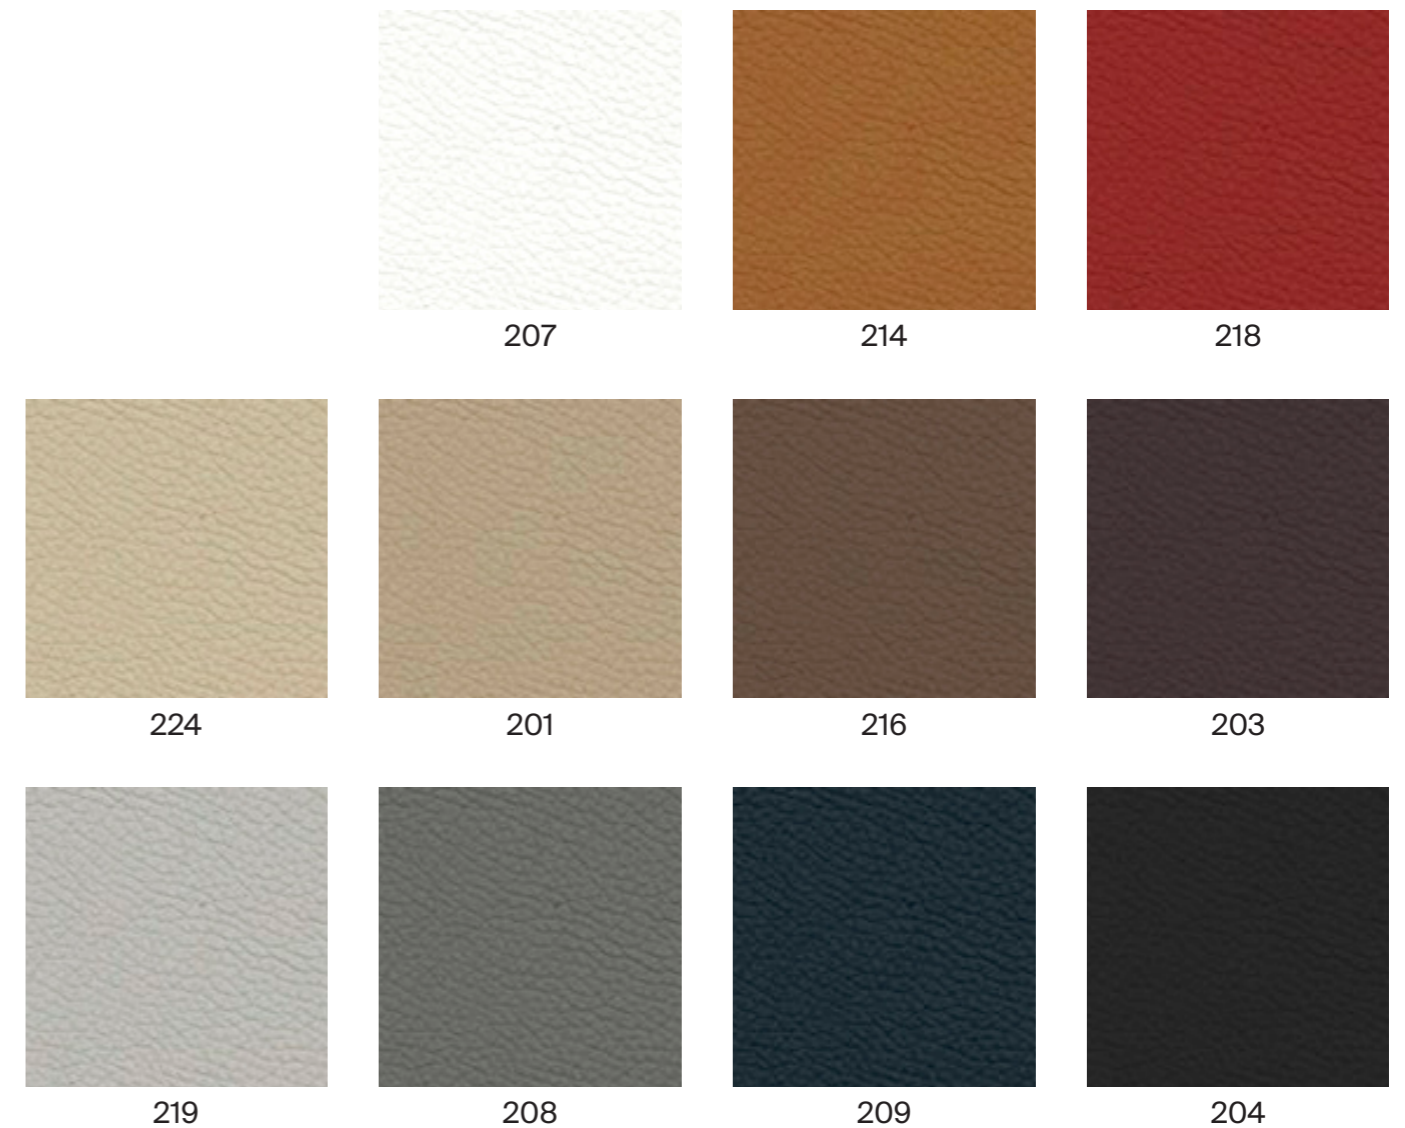

G11 - LEATHER

TECHNICAL DATA

Composition:

Cow leather.

Light fastness:

≥5, UNI EN ISO 105B02.

Fastness to rubbing:

Wet ≥4 (80 cycles).

Dry ≥4 (500 cycles).

Perspiration ≥4 (50 cycles), UNI EN ISO 11640 - 11641.

Tear strength:

≥20N, EN ISO 3377-1.

Determination of PH:

≥3,5 ≤0,7 EN ISO 4045.

Adhesion of the finish:

≥2,5N / 10mm, UNI EN ISO 11644.

Determination of dry flex resistance:

>50.000 cycles, UNI EN ISO 5402-1.

Flammability:

Ignition source 0 (cigarette)

Ignition source 1 (match), BS 5852-1:79.

Thickness:

0,9 - 1,1mm

Average surface:

4,8 - 5,0m²

Maintenance:

Wash with neutral soap and water or with a cleaning product for leather.

***Batch to batch variations may occur within commercial tolerances.

Note:

- The real colours and tones of the fabrics may differ from the digital image due to the scan process and the colour calibration of the different screens. Always request a real leather sample before ordering.

- Consult our Fabric and Leather Matrix to know about the availability of this material by product line.

