


## w171 Alma signal white

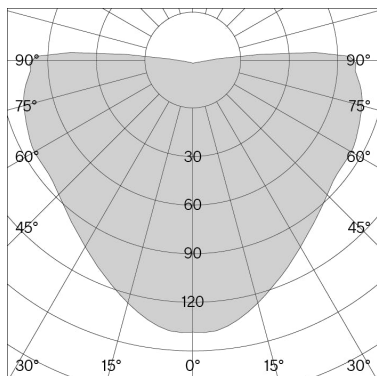

## Technical information

### Physical

<b>Material</b>	Shade: aluminium Ceiling / Wall bracket: steel Canopy: polyamide
-----------------	---

<b>IP-rating</b>	20
------------------	----

<b>Protection class</b>	cw: I s/w: II
-------------------------	---------------

### LED

<b>Light source</b>	1 x E27 socket
---------------------	----------------

<b>Life time expectancy</b>	15,000 h
-----------------------------	----------

<b>CRI Colour Rendering Index</b>	≥ 80
-----------------------------------	------

**Replaceable light source by end-user**

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The applicable General Terms & Conditions apply.

## Article-specific information

### Version

### Mounting

### LED Colour temperature (CCT) / Luminous flux

### Voltage / System power

### Efficacy

### Light control

### Net weight

### Packaging dimensions

### Gross weight

### Colour / Finish

**Signal white (RAL 9003)** ●

**Grey white (RAL 9002)** ●

**Raw** ●

### Accessories


**1-phase track adapter white**

**1-phase track adapter black**

**3-phase track adapter white**

**3-phase track adapter black**

## w171 Alma s

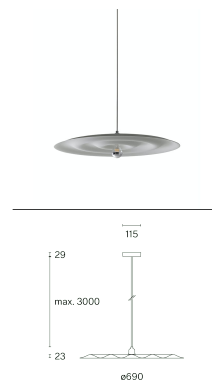

## s

Ceiling suspended

2700 K / 660 lm

220–240 V / Max. 12 W LED

94 lm / W

Phase-cut dim

2.6 kg

L77 × W78 × H8 cm (0.05 m<sup>3</sup>)

3.8 kg

### Art. No. / EAN code

**171S19003** / 7330492007953

**171S19002** / 7330492007946

**171S10002** / 7330492001715

### Art. No. / EAN code


**ACC00102** / 7330492001920

**ACC00105** / 7330492001937


**ACC00202** / 7330492001944

**ACC00205** / 7330492001951

## w171 Alma c/w



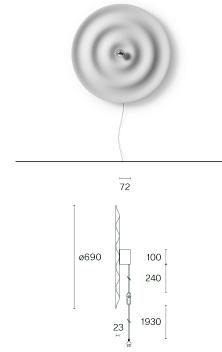


## w171 Alma w



## Article-specific information

Version	c/w	w
Mounting	Ceiling / Wall	Wall
LED Colour temperature (CCT) / Luminous flux	2700 K / 660 lm	2700 K / 660 lm
Voltage / System power	220–240 V / Max. 12 W LED	220–240 V / Max. 12 W LED
Efficacy	94 lm / W	94 lm / W
Light control	Phase-cut dim	Dimmer switch on cord
Net weight	2.8 kg	2.9 kg
Packaging dimensions	L77 × W78 × H8 cm (0.05 m <sup>3</sup> )	L77 × W78 × H8 cm (0.05 m <sup>3</sup> )
Gross weight	4.0 kg	4.1 kg

### Colour / Finish

Signal white (RAL 9003)		<b>171C/</b> W19003	<b>171W19003</b> / 7330492007977
Grey white (RAL 9002)		<b>171C/</b> W19002	<b>171W19002</b> / 7330492007960
Raw		<b>171C/</b> W10002	<b>171W10002</b> / 7330492001722

### Accessories

1-phase track adapter white	Art. No. / EAN code	Art. No. / EAN code
1-phase track adapter black		
3-phase track adapter white		
3-phase track adapter black		