


w222 Focal



Technical information

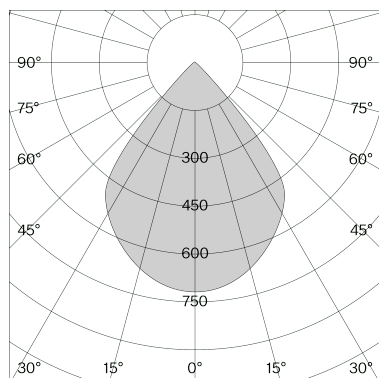


Physical	
Material	Lamp body: aluminium Canopy: polycarbonate
Optics	Lens: PMMA Reflector: polycarbonate
IP rating	20
Protection class	I
LED	
Light source	COB LED (included)
Lifetime expectancy	L80 / 50,000 h
CRI Colour rendering index	90
Standard deviation of colour	3-step MacAdam
Replaceable by a professional	

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The applicable General Terms & Conditions apply.







Article-specific information

Version	c
Mounting	Ceiling
LED Colour temperature (CCT) / Luminous flux	2700 K / 885 lm
Voltage / System power	220–240 V / 9.6 W
Efficacy	92 lm / W
Light control	Phase-cut dim / DALI dim-Push dim / Casambi
Net weight	0.48 kg
Packaging dimensions	L22.3 × W20.9 × H17.7 cm
Gross weight	0.85 kg

Phase-cut dim

Traffic white (RAL 9016)	
Jet black (RAL 9005)	
Raw tumbled	

DALI dim-Push dim

Traffic white (RAL 9016)	
Jet black (RAL 9005)	
Pale red (NCS S 1010-Y90R)	
Pale green (NCS S 2005-B50G)	
Pale blue (NCS S 1010-R90B)	
Raw tumbled	

Accessories

Casambi module
Ceiling installation cover plate
1-phase track adapter white
1-phase track adapter black
3-phase track adapter white
3-phase track adapter black
3-phase track DALI adapter white
3-phase track DALI adapter black

w222 Focal c



Version	c
Mounting	Ceiling
LED Colour temperature (CCT) / Luminous flux	2700 K / 885 lm
Voltage / System power	220–240 V / 9.6 W
Efficacy	92 lm / W
Light control	Phase-cut dim / DALI dim-Push dim / Casambi
Net weight	0.48 kg
Packaging dimensions	L22.3 × W20.9 × H17.7 cm
Gross weight	0.85 kg

Art. No. / EAN code

222C102271 / 7330492001395
222C105271 / 7330492001401
222C120271 / 7330492001449


Art. No. / EAN code

222C102272 / 7330492000367
222C105272 / 7330492000374
222C103272 / 7330492000381
222C101272 / 7330492000398
222C106272 / 7330492000404
222C120272 / 7330492001302


Art. No. / EAN code

DR-0601 / 7330492000510
222-JC02 / 7330492002507



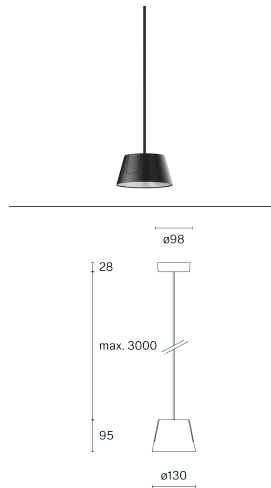



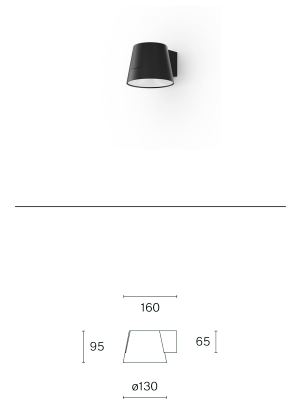


w222 Focal s




w222 Focal w



Article-specific information

Version	s	w
Mounting	Ceiling suspended	Wall
LED Colour temperature (CCT) / Luminous flux	2700 K / 885 lm	2700 K / 885 lm
Voltage / System power	220–240 V / 9.6 W	220–240 V / 9.6 W
Efficacy	92 lm / W	92 lm / W
Light control	Phase-cut dim / DALI dim-Push dim / Casambi	Phase-cut dim / DALI dim-Push dim / Casambi
Net weight	0.73 kg	0.48 kg
Packaging dimensions	L22.3 × W21.2 × H20 cm	L22.3 × W20.9 × H17.7 cm
Gross weight	1.2 kg	0.85 kg
Phase-cut dim	Art. No. / EAN code	Art. No. / EAN code
Traffic white (RAL 9016) 	222S102271 / 7330492001456	222W102271 / 7330492001517
Jet black (RAL 9005) 	222S105271 / 7330492001463	222W105271 / 7330492001524
Raw tumbled 	222S120271 / 7330492001500	222W120271 / 7330492001526
DALI dim-Push dim	Art. No. / EAN code	Art. No. / EAN code
Traffic white (RAL 9016) 	222S102272 / 7330492000411	222W102272 / 7330492000466
Jet black (RAL 9005) 	222S105272 / 7330492000428	222W105272 / 7330492000374
Pale red (NCS S 1010-Y90R) 	222S103272 / 7330492000435	222W103272 / 7330492000480
Pale green (NCS S 2005-B50G) 	222S101272 / 7330492000442	222W101272 / 7330492000497
Pale blue (NCS S 1010-R90B) 	222S106272 / 7330492000459	222W106272 / 7330492000503
Raw tumbled 	222S120272 / 7330492001319	222W120272 / 7330492001326
Accessories	Art. No. / EAN code	Art. No. / EAN code
Casambi module	DR-0601 / 7330492000510	DR-0601 / 7330492000510
Ceiling installation cover plate		
1-phase track adapter white	ACC00102 / 7330492001920	
1-phase track adapter black	ACC00105 / 7330492001937	
3-phase track adapter white	ACC00202 / 7330492001944	
3-phase track adapter black	ACC00205 / 7330492001951	
3-phase track DALI adapter white	ADAPT1-001 / 7330492001982	
3-phase track DALI adapter black	DAPT1-002 / 7330492001999	

w222 Focal r



Article-specific information

Version	r
Mounting	Semi recessed
LED Colour temperature (CCT) / Luminous flux	2700 K / 885 lm
Voltage / System power	220–240 V / 9.6 W
Efficacy	92 lm / W
Light control	Phase-cut dim / DALI dim-Push dim
Net weight	0.3 kg
Packaging dimensions	L16.1 × W14.5 × H10.6 cm
Gross weight	0.47 kg

Phase-cut dim

	Art. No. / EAN code
Traffic white (RAL 9016)	222R102271 / 7330492001371
Jet black (RAL 9005)	222R105271 / 7330492001364
Raw tumbled	222R120271 / 7330492001388

DALI dim-Push dim

	Art. No. / EAN code
Traffic white (RAL 9016)	222R102272 / 7330492001340
Jet black (RAL 9005)	222R105272 / 7330492001333
Pale red (NCS S 1010-Y90R)	
Pale green (NCS S 2005-B50G)	
Pale blue (NCS S 1010-R90B)	
Raw tumbled	222R120272 / 7330492001357

Accessories

	Art. No. / EAN code
Casambi module	DR-0601 / 7330492000510
Ceiling installation cover plate	
1-phase track adapter white	
1-phase track adapter black	
3-phase track adapter white	
3-phase track adapter black	
3-phase track DALI adapter white	
3-phase track DALI adapter black	