



w227 Winkel alu

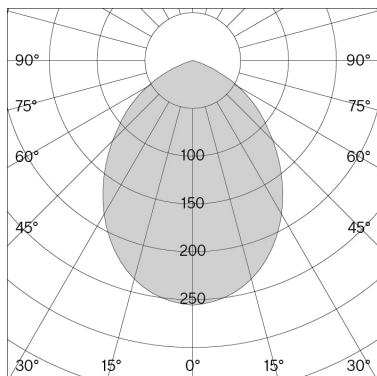

w227 Winkel alu

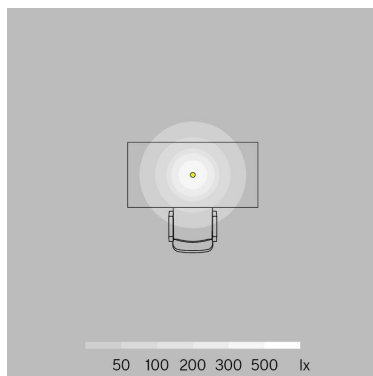

w227 Winkel alu b



Technical information

Physical

Material	Lamp body: aluminium Base & pin: steel
-----------------	--

Optics	Diffuser: acrylic Reflector & glare shade: polyamide
---------------	--

IP rating	20
------------------	----

Protection class	II
-------------------------	----

LED

Light source	COB LED (included)
---------------------	--------------------

Lifetime expectancy	L80 / 50.000 h
----------------------------	----------------

CRI Colour rendering index	97
-----------------------------------	----

Standard deviation of colour matching	3-step MacAdam
--	----------------

Replaceable by a professional

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The applicable General Terms & Conditions apply.

Article-specific information

Version

Mounting

LED Colour temperature (CCT) / Luminous flux

Voltage / System power

Efficacy

Light control


Net weight


Packaging dimensions

Gross weight

Colour / Finish

Traffic white (RAL 9016) 

Jet black (RAL 9005) 

Raw tumbled 

Accessories

Adapter suitable for USM Haller Table

Adapter suitable for USM Haller Shelf

Adapter suitable for Vitra Joyn 2

Adapter suitable for Vitra Tyde 2

b

Base

3000 K / 497 lm

100–240 V / 8.2 W

60 lm / W

Integrated dimmer switch (timer 8h)

3.33 kg

L53 × W36.5 × H14.3 cm

5.13 kg

Art. No. / EAN code


227B20230 / 7330492000701

227B20530 / 7330492000718

227B22030 / 7330492001692




Art. No. / EAN code

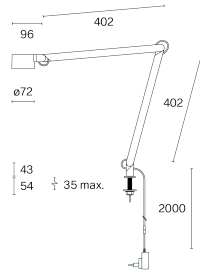w227 Winkel alu p



Article-specific information

Version	p
Mounting	Pin - integrated (hole \varnothing 14 mm)
LED Colour temperature (CCT) / Luminous flux	3000 K / 497 lm
Voltage / System power	100–240 V / 8.2 W
Efficacy	60 lm / W
Light control	Integrated dimmer switch (timer 8h)
Net weight	0.6 kg
Packaging dimensions	L53 × W36.5 × H14.3 cm
Gross weight	2.4 kg

Colour / Finish	Art. No. / EAN code
Traffic white (RAL 9016) 	227P20230 / 7330492000725
Jet black (RAL 9005) 	227P20530 / 7330492000732
Raw tumbled 	227P22030 / 7330492001708

Accessories	Art. No. / EAN code
Adapter suitable for USM Haller Table	227ACC001 / 7330492002040
Adapter suitable for USM Haller Shelf	227ACC006 / 7330492002057
Adapter suitable for Vitra Joyn 2	227ACC002 / 7330492002064
Adapter suitable for Vitra Tyde 2	227ACC003 / 7330492002071