




w242 Pastille alu

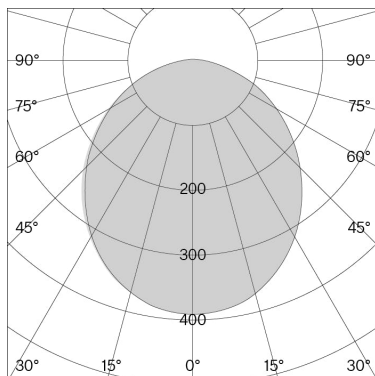

w242 Pastille alu

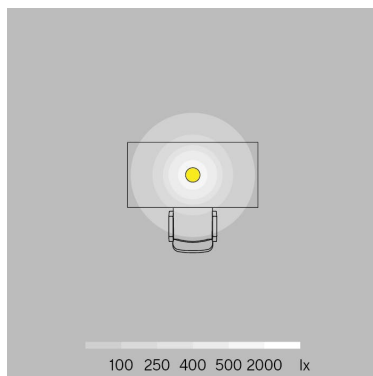

w242 Pastille alu b2

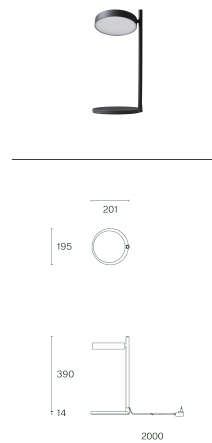

Technical information

Physical

Material	Lamp body: aluminium Table base/clamp: aluminium & steel Pin/bracket: aluminium Floor stand: steel
-----------------	---

Optics	Reflector: ABS Diffuser: polycarbonate
---------------	---

IP rating	20
------------------	----

Protection class	II
-------------------------	----

LED

Light source	COB LED (included)
---------------------	--------------------

Life time expectancy	L80 / 50,000 h
-----------------------------	----------------

CRI Colour Rendering Index	95
-----------------------------------	----

Standard deviation of colour matching	3-step MacAdam
--	----------------

Replaceable by a professional

Article-specific information

Version

Mounting

LED Colour temperature (CCT) / Luminous flux

Voltage / System power

Efficacy

Light control

Net weight

Packaging dimensions

Gross weight

Colour

Traffic white (RAL 9016) ●

Jet black (RAL 9005) ●

Olive green (RAL 6003) ●

Oxide red (RAL 3009) ●

Raw tumbled ●

Telegray 4 (RAL 7047) ●

Accessories

Adapter suitable for Vitra Joyn 2 / Tyde 2

Adapter suitable for USM Haller table

Adapter suitable for USM Haller shelf

b2

Base

2700 K / 547 lm

100–240 V / 7.4 W

63 lm / W

Dimmable

1.7 kg

L51.0 × W23.2 × H7.8 cm (0.009 m³)

2.3 kg

Art. No. / EAN code

242B20227 / 7330492011684

242B20527 / 7330492011745

242B20127 / 7330492011660

242B20327 / 7330492011707


242B22027 / 7330492011769

242B20427 / 7330492011721


Art. No. / EAN code

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The applicable General Terms & Conditions apply.

w242 Pastille alu c1

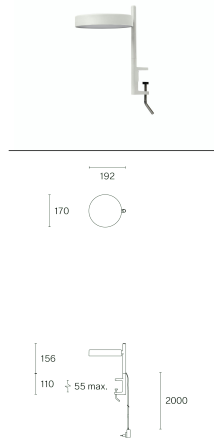



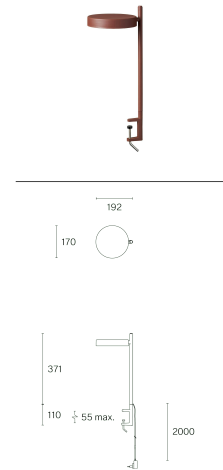


w242 Pastille alu c2




Article-specific information


Version	c1	c2
Mounting	Clamp	Clamp
LED Colour temperature (CCT) / Luminous flux	2700 K / 547 lm	2700 K / 547 lm
Voltage / System power	100–240 V / 7.4 W	100–240 V / 7.4 W
Efficacy	63 lm / W	63 lm / W
Light control	Dimmable	Dimmable
Net weight	0.6 kg	0.7 kg
Packaging dimensions	L36.0 × W22.3 × H5.2 cm (0.004 m ³)	L51.0 × W23.2 × H7.8 cm (0.009 m ³)
Gross weight	0.9 kg	1.3 kg

Colour	Art. No. / EAN code	Art. No. / EAN code
Traffic white (RAL 9016)	 242CL10227 / 7330492012162	242CL20227 / 7330492012285
Jet black (RAL 9005)	 242CL10527 / 7330492012223	242CL20527 / 7330492012346
Olive green (RAL 6003)	 242CL10127 / 7330492012148	242CL20127 / 7330492012261
Oxide red (RAL 3009)	 242CL10327 / 7330492012186	242CL20327 / 7330492012308
Raw tumbled	242CL12027 / 7330492012247	242CL22027 / 7330492012360
Telegray 4 (RAL 7047)	 242CL10427 / 7330492012209	242CL20427 / 7330492012322
Accessories	Art. No. / EAN code	Art. No. / EAN code
Adapter suitable for Vitra Joyn 2 / Tyde 2		
Adapter suitable for USM Haller table		
Adapter suitable for USM Haller shelf		

w242 Pastille alu p2

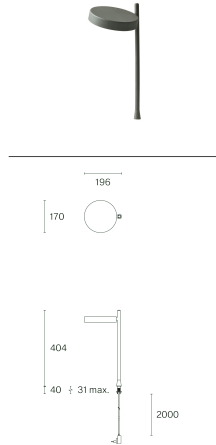

w242 Pastille alu f2

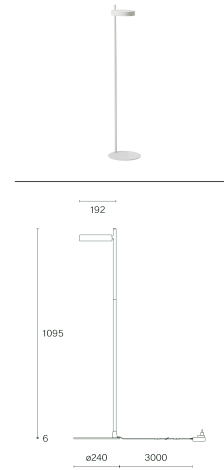


Article-specific information


Version	p2	f2
Mounting	Pin – Integrated (hole ø 20 mm)	Floor base
LED Colour temperature (CCT) / Luminous flux	2700 K / 547 lm	2700 K / 547 lm
Voltage / System power	100–240 V / 7.4 W	100–240 V / 7.4 W
Efficacy	63 lm / W	63 lm / W
Light control	Dimmable	Dimmable
Net weight	0.7 kg	3.6 kg
Packaging dimensions	L51.0 × W23.2 × H7.8 cm (0.009 m ³)	L119.6 × W28.8 × H6.8 cm (0.02 m ³)
Gross weight	1.3 kg	5.5 kg

Colour	Art. No. / EAN code	Art. No. / EAN code
Traffic white (RAL 9016)	242P20227 / 7330492012568	242F20227 / 7330492012469
Jet black (RAL 9005)	242P20527 / 7330492012629	242F20527 / 7330492012520
Olive green (RAL 6003)	242P20127 / 7330492012544	242F20127 / 7330492012445
Oxide red (RAL 3009)	242P20327 / 7330492012582	242F20327 / 7330492012483
Raw tumbled	242P22027 / 7330492012643	
Telegray 4 (RAL 7047)	242P20427 / 7330492012605	242F20427 / 7330492012506
Accessories	Art. No. / EAN code	Art. No. / EAN code
Adapter suitable for Vitra Joyn 2 / Tyde 2	242-ADAPT001 / 7330492011639	
Adapter suitable for USM Haller table	242-ADAPT002 / 7330492011646	
Adapter suitable for USM Haller shelf	242-ADAPT003 / 7330492011653	

w242 Pastille alu br1



w242 Pastille alu br2



Article-specific information

Version	br1	br2
Mounting	Wall bracket	Wall bracket
LED Colour temperature (CCT) / Luminous flux	2700 K / 547 lm	2700 K / 547 lm
Voltage / System power	100–240 V / 7.4 W	100–240 V / 7.4 W
Efficacy	63 lm / W	63 lm / W
Light control	Dimmable	Dimmable
Net weight	0.6 kg	0.6 kg
Packaging dimensions	L36.0 × W22.3 × H5.2 cm (0.004 m ³)	L51.0 × W23.2 × H7.8 cm (0.009 m ³)
Gross weight	0.9 kg	1.3 kg

Colour	Art. No. / EAN code	Art. No. / EAN code
Traffic white (RAL 9016)	242BR10227 / 7330492011868	242BR20227 / 7330492011981
Jet black (RAL 9005)	242BR10527 / 7330492011929	242BR20527 / 7330492012049
Olive green (RAL 6003)	242BR10127 / 7330492011844	242BR20127 / 7330492011967
Oxide red (RAL 3009)	242BR10327 / 7330492011882	242BR20327 / 7330492012001
Raw tumbled	242BR12027 / 7330492011943	242BR22027 / 7330492012063
Telegray 4 (RAL 7047)	242BR10427 / 7330492011905	242BR20427 / 7330492012025
Accessories	Art. No. / EAN code	Art. No. / EAN code
Adapter suitable for Vitra Joyn 2 / Tyde 2		
Adapter suitable for USM Haller table		
Adapter suitable for USM Haller shelf		